

Data Sheet for Precision Potentiometer

Multiturn Hybrid Potentiometer

Series AL24



The AL24 potentiometers in 20 mm housing are suitable for applications where a long life span and high-resolution multiturn potentiometer is important.

- Very high-resolution and long-lasting due to hybrid technology
- Very clean signal - no winding jumps thanks to hybrid technology
- With many options e.g. limit switch, slipping clutch

The high-resolution precision potentiometers of the AL24 series have a wire-wound resistor element, which is finished with a conductive plastic layer. Thus the so-called winding jumps are omitted and the resolution is almost infinite. Due to the smooth surface of the resistance element, the hybrid potentiometer has a significantly longer life span than wirewound potentiometers.

Electrical Data	3-turn	5-turn	10-turn
Effective electrical angle of rotation 1.)	1080° ±5°	1800° ±5°	3600° ±5°
Total resistance 1.)	1..50 kOhm		2..100 kOhm
Resistance tolerance	±5%		
Independent linearity (best straight line) 1.)	±0,25%	±0,25% (±0,2%)	±0,25% (±0,1%)
Theoretical resolution 1.)	Nearly infinite		
Backlash (Hysteresis) 1.)	≤ 2°		
Max. / recommended wiper current 1.)	10 µA / 2 µA		
Power rating @ 70°C (0W @ 105°C)	0,75 W	1 W	2 W
Insulation Voltage 1.)	1000 VAC, 1min		
Insulation Resistance 1.)	100 MOhm @ 1000 VDC		

Mechanical Data, Environmental Conditions, Miscellaneous	3-turn	5-turn	10-turn
Mechanical angle of rotation	1080° +10°	1800° +10°	3600° +10°
Lifetime (90% el. eff. angle half sine) 2.)	2,5 Mio. rotations	5 Mio. rotations	10 Mio. rotations
Max. operational speed	40 rev. / min.		
Bearing	Sleeve bearing		
Operational torque @ ambient temperature 1.) 2.)	5 Nmm		
End stop torque 1.) 2.)	90 Ncm		
Operating temperature range	-55..+105°C		
Storage temperature range	-55..+105°C		
Protection grade (IEC 60529)	IP40		
Protection option D shaft sealing (IEC 60529)	IP65 optional		
Vibration (IEC 68-2-6, Test Fc)	15g 10..2000Hz x 12h		
Shock (IEC 68-2-27, Test Ea)	49g @ 11 ms x 18		
Housing diameter	20 mm		
Housing depth	18 mm	25,5 mm	
Shaft diameter (HH17/19)	6,35 mm (optional 6,00 mm)		
Shaft type	Solid shaft		

Data Sheet for Precision Potentiometer

Multiturn Hybrid Potentiometer

Series AL24

Mechanical Data, Environmental Conditions, Miscellaneous	3-turn	5-turn	10-turn
Max. radial load		≤1 N	
Max. axial load		≤1 N	
Connection type		Gold plated soldering lugs	
Connection position		Radial	
Sensor mounting		Bushing	
Mass	20 g		25 g
Fastening parts included in delivery		Nut, toothed washer	
Fastening torque mounting nut		150 Ncm	
Material shaft		Stainless steel	
Material housing		Plastic	

1.) According IEC 60393

2.) Determined by climatic conditions according to IEC 68-1, para. 5.3.1 without load collectives

Please note: Max. permissible supply voltage <75 VDC respectively <50 VAC in addition the max. power rating must be observed

Data Sheet for Precision Potentiometer

Multiturn Hybrid Potentiometer

Series AL24

Order code

Description		Selection: standard=black/bold, possible options=grey/cursive											
Series	AL24												
Revolutions with stop:													
Option 3-turn		03											
5-turn		05											
10-turn		10											
Slipping clutch:													
Without additional mechanics			-										
Option with integr. slipping clutch			R										
Resistance value / Option Tandem:													
Option 1 kOhm (only 3 and 5-turn)				R1k	/1k								
Option 2 kOhm				R2k	/2k								
5 kOhm				R5k	/5K								
10 kOhm				R10k	/10K								
Option 20 kOhm				R20K	/20K								
Option 50 kOhm				R50K	/50k								
Option 100 kOhm (only 10 Turn)				R100K	/100k								
Option rear shaft:													
Standard Ø2,00 x 10 mm						RA							
Shaft length in mm						RAxx,xx							
Shaft diameter in mm (≤6,35 mm)						RADMx,xx							
Resistance tolerance:													
±5%							W5%						
Independent linearity:													
±0,25%								L0,25%					
Option ±0,10% (10 Turn)								L0,1%					
Option ±0,20% (5 Turn)								L0,2%					
Option center tap:									CT				
Front shaft:													
Standard Ø6,35 x 20,6 mm													
Option shaft diameter 6,00 mm										-			
Option shaft length in mm										DM6,00			
Option shaft diameter in mm (≤6,35 mm)										Ax,xx			
										DMx,xx			
Option screwdriver slot:											B		
Option limit switch - on request:													
Type CW+CCW ("n"=number Turns)												LS"n"202	
Type CCW ("n"=number Turns)												LS"n"201	
Type CW ("n"=number Turns)												LS"n"203	
Shaft sealing:													
Standard is without sealing													-
Option D with shaft sealing													D

For higher quantities or on-going demand, additional options are available as described below on request


For Example: Multi ganged potentiometers (max. 2), sealed housing case, special electrical and mechanical angles of rotation, and special resistance and linearity tolerances. Furthermore we can mount gear wheels or attach cable assemblies with or without connectors and much more.

Data Sheet for Precision Potentiometer


Multiturn Hybrid Potentiometer

Series AL24

Drawing

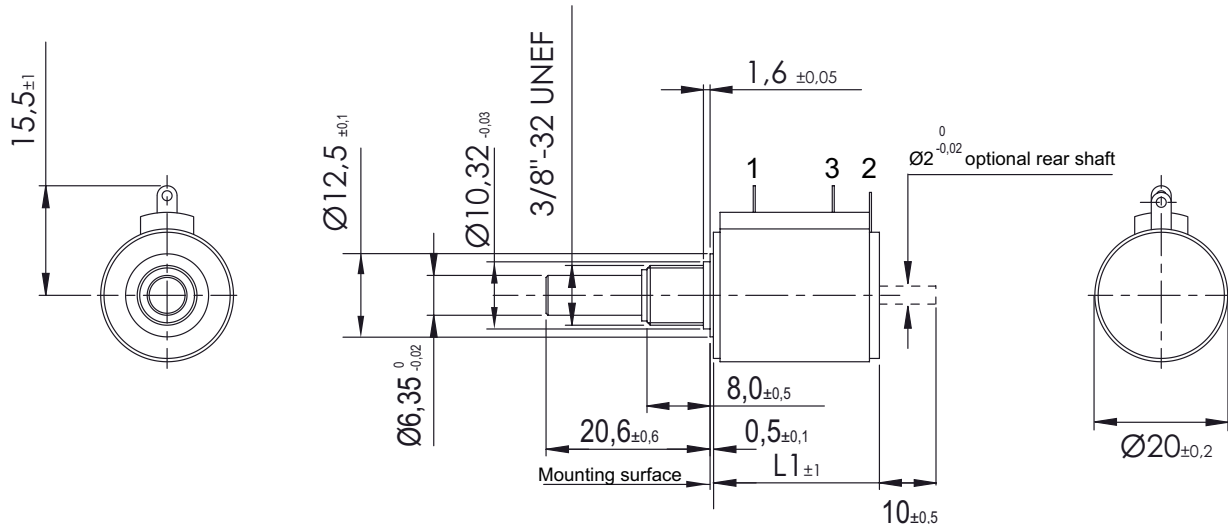


Type	L1	Tandem ± 1
AL24 03/05	18	38
AL24 10	25,5	53



Dimensions in mm

Option: limit switch

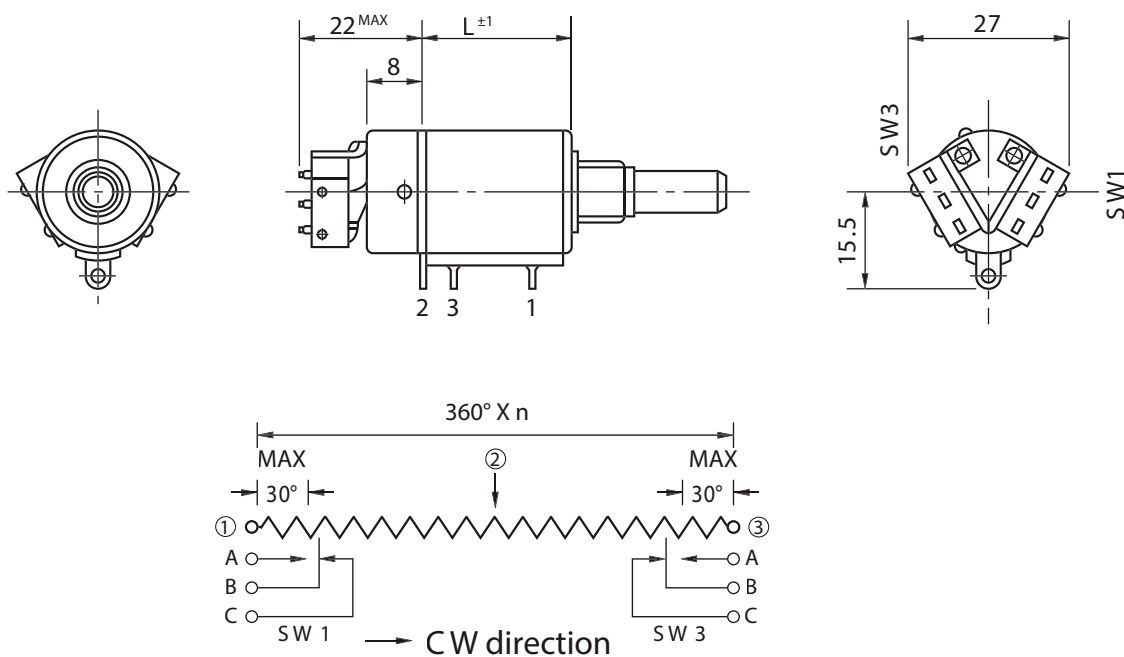

- Unless otherwise specified, the limit-switch is of inscription type on both ends.
- Rating of limit-switch 1A, 125V.A.C. (resistance load)
 - Life expectancy of limit-switch: 50,000 operations
 - Operating temperature range: -55° C..+105°C


Data Sheet for Precision Potentiometer

Multiturn Hybrid Potentiometer


Series AL24

On Request: Special machining on shaft


Slot

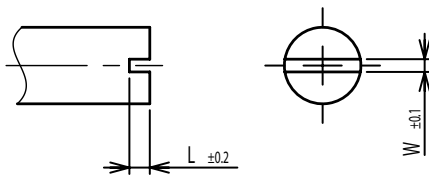


Groove

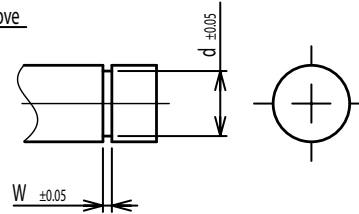


Flat

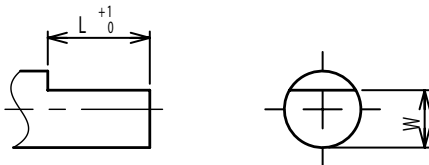


Round top

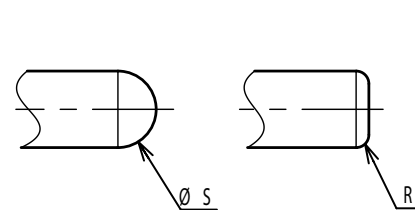


Double side flat

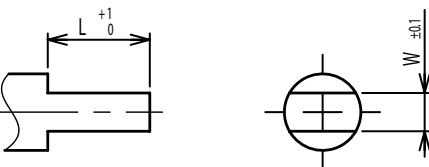


Counterbore hole

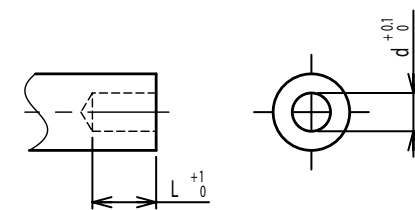


Step

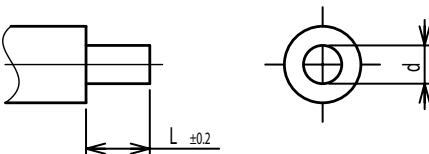


Counterbore screw hole

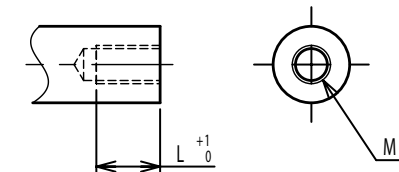

Screw Thread

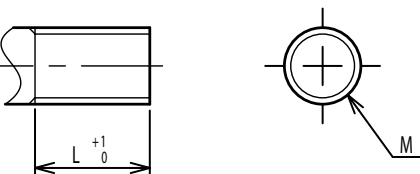

Pin hole

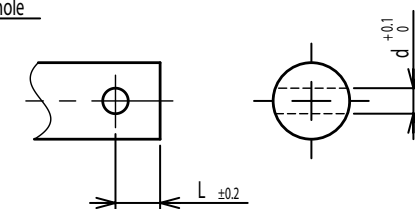

Knurled(Parallel)



Screw thread inside hole

