

Data Sheet for Angle Sensors

Optical incremental Encoder

Series SPE



- Optical resolution up to 1000 pulses per revolution
- 22 mm housing diameter
- 11,7 mm housing depth
- Shaft diameters: 6 mm, 6.35 mm, 3.175 mm
- Ball or sleeve bearing
- Supply voltage 5 VDC
- Signal Output TTL
- Molex Connector

Compact optical incremental encoder with possibility of choice between three different operating torques. With increased torque option the SPE could be also used as a high quality optical panel encoder.

Electrical Data	TTL	Line Driver
Output signal	5 V - A, B	differential 3.8 V - A, /A, B, /B
Number of pulses	100..1000 Imp./U	
Output voltage high	≥ 2.4 V @ -8 mA with load (4 V @ no load)	≥ 4.75 V @ 25 mA with load (5 V typ. @ no load)
Output voltage low	≤ 0.4 V @ 8 mA with load (0.035 V @ no load)	≤ 0.6 V @ 4.5 mA with load (0.25 V typ. @ no load)
Differential output voltage	-	≥ 3.0 V @ RL = 100 Ω (typ. 3.8 V)
Limit frequency	100 kHz	
Supply voltage	5 VDC ±10 %	
Power consumption no load	≤ 30 mA (typ. 25 mA)	≤ 32 mA (typ. 27 mA)
Output capacity	8 mA per output channel (A or B)	
Output electronics	TTL	Line Driver
Switch on-delay	100 ns (rise time) / 50 ns (fall time)	20 ns (rise/fall time)

Mechanical and Environmental Data, Miscellaneous	
Mechanical angle of rotation /stroke 1.)	360° without stop
Lifetime 2.)	> 1 Mio. shaft revolutions for sleeve bearing
Bearing	Sleeve bearing or ball bearing
Max. operational speed	
Sleeve bearing	100 rev./min
Ball bearing	15000 rev./min
Max. acceleration	
Sleeve bearing	10000 rad/sec ²
Ball bearing	250000 rad/sec ²
Operational torque @ RT 1.) 2.)	
Sleeve bearing with low torque (Version NT)	0.2 Ncm
Sleeve bearing with increased torque	0.4 ±0,1 Ncm
Ball bearing with very low torque (Version KL)	0.01 Ncm
Operating temperature range	-20..+100 °C
Storage temperature range	-20..+100 °C
Protection grade shaft side (IEC 60529) standard	IP40

Data Sheet for Angle Sensors

Optical incremental Encoder

Series SPE

Mechanical and Environmental Data, Miscellaneous

Vibration (IEC 68-2-6, Test Fc)	20 g / 20 bis 2000 Hz / sine waveform
Shock (IEC 68-2-27, Test Ea)	75 g / 6 ms / halfsine
Housing diameter / length	22 mm
Housing depth	11.73 mm
Shaft diameter	6 mm, 6.35 mm, 3.175 mm
Shaft type	Solid shaft
Max. radial load	< 1 N
Max. shaft load	< 8.9 N (sleeve bearing) / < 4,4 N (ball bearing)
Connection type	Molex coupling
Connection position	Radial
Sensor mounting	Bushing
Mass	app. 13 g
Fastening parts included in delivery	Hex nut and tooth washer
Fastening torque mounting nut	< 2.25 Nm
Material shaft	Stainless steel with sleeve bearing Brass with ball bearing
Material housing	Plastic
Material disc	Mylar
Immunity ESD, human body model (MIL-STD-883, Method 3015.8)	± 7 kV (TTL) / ± 12 kV (Line Driver)

1.) According IEC 60393

2.) Determined by climatic conditions according to IEC 68-1, para. 5.3.1 without load collectives

Data Sheet for Angle Sensors

Optical incremental Encoder


Series SPE

For higher quantities or on-going demand, additional options are available as described below

For example:

- Special shaft
- Other operational torques
- Special connector and cable design

Technical Drawing

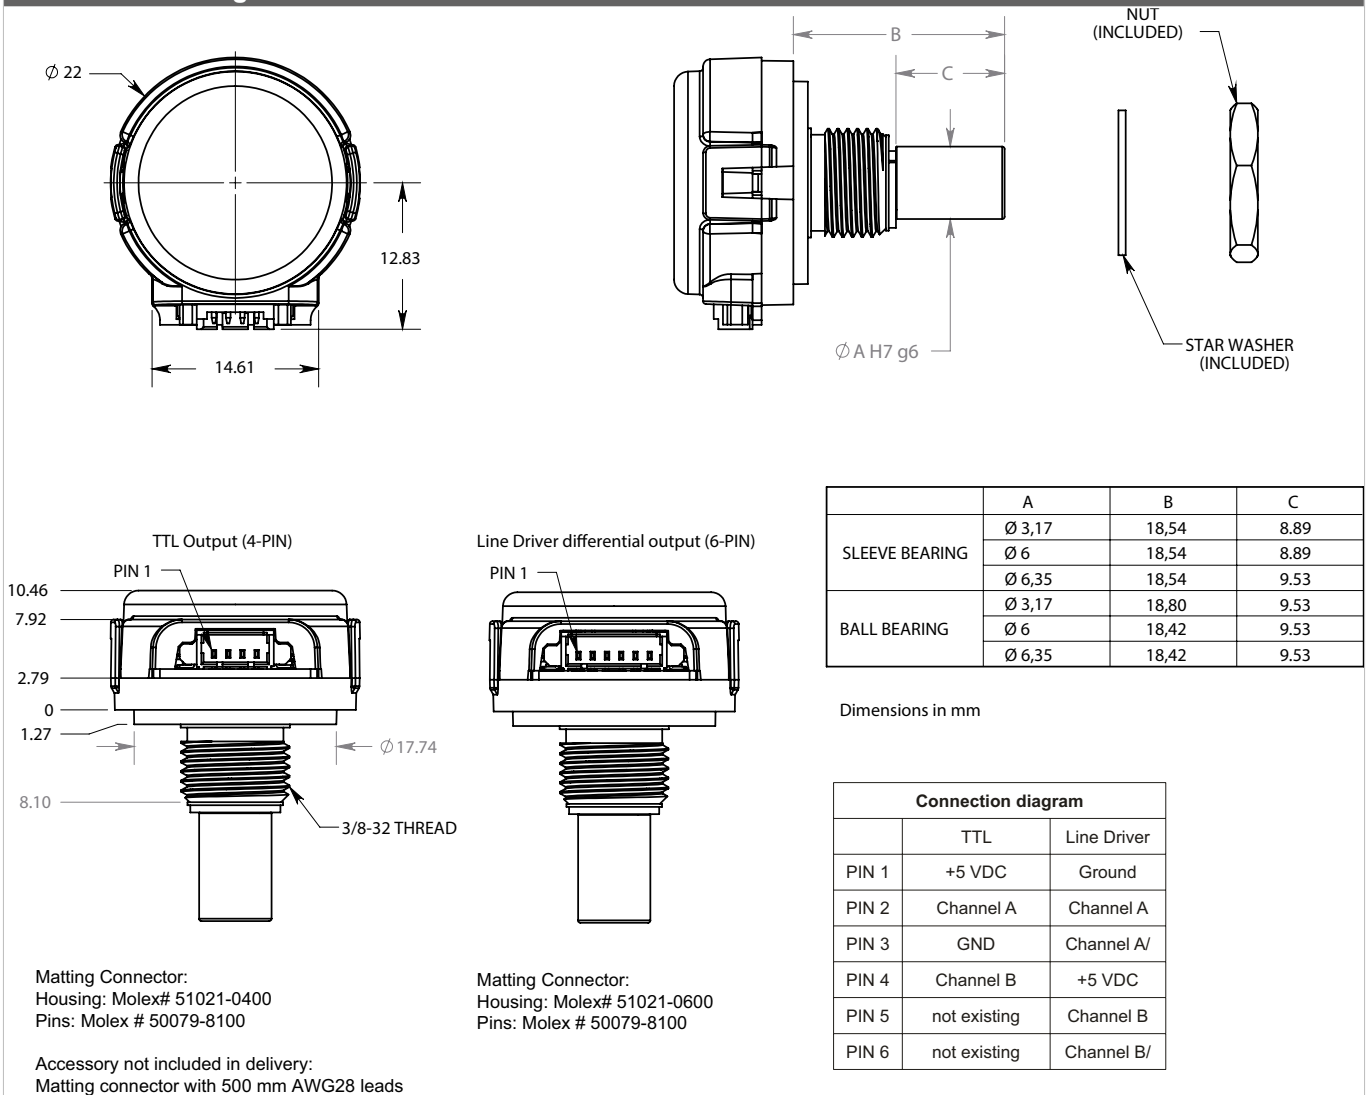

Output waveform

