

Data Sheet for Precision Resistors

Thermistor PTC resistor (metal foil)

Series TM



- Metal foil resistor with excellent long term stability
- Resistance range from 5Ω..1kΩ
- Resistance tolerances up to ±0,5% @0°C
- Temperature coefficients up to 6590ppm @0°..100°C
- Linear temperature characteristics
- Quick response time
- Customized TCR (on request)

Electrical Specification	TMA 1	TMA 2	TMB 1	TMB 2
Resistance range	5Ω..100Ω	5Ω..200Ω	5Ω..500Ω	5Ω..1kΩ
Resistance tolerance @ 0°C	±0,5%...±5%			
Power rating @ 70°C	0,125W	0,25W	0,125W	0,25W
Max. working voltage	250V	300V	250V	300V
TCR-rate	+4250ppm±1%/°C @0°..100°C		+6040ppm±1%/°C @0°..25°C +6220ppm±1%/°C @0°..50°C +6590ppm±1%/°C @0°..100°C	
Working temperature range (max.)	-25..+125°C			

Mechanical Specification	
Resistance technology / material	Metal foil
Housing material	Epoxy dipped
Connections	Cooper tinned


Parameters	Test Conditions	Specification ΔR
Short time overload	2,5 x rated voltage, 5 sec.	±0,03%
Life span (biased)	70°C, rated power, 90 min. on 30 min off, 1000 h	±0,03%
High temperature / humidity	+65°C..-10°C, 90..98% RH rated voltage, 10 cycles, 240h	±0,02%
Temperature shock	-25°C (30 min.), +25°C (5 min.), +125°C (30 min), 5 cycles	±0,03%
High temperature exposure	+125°C, no load 1000 h	±0,1%
Solderability	235°C, 2 sec.	Coverage > 75%
Resistance to soldering heat	350°C, 3 sec.	±0,01%
Isolation resistance	100 VDC, 1 min.	>10.000MΩ
Dielectric strength	Atmo. Pres.: 300 VAC, 1 min.	±0,03%
Shock	50G, 11 ms, halfsine, X, Y, Z each 3 shocks	±0,03%
Vibration	20G, 10Hz zu 55Hz zu 10Hz, 1 min. each 1 x X, Y, Z 2h	±0,03%

Data Sheet for Precision Resistors


Thermistor PTC resistor (metal foil)

Series TM


Temperature Characteristics of Resistance

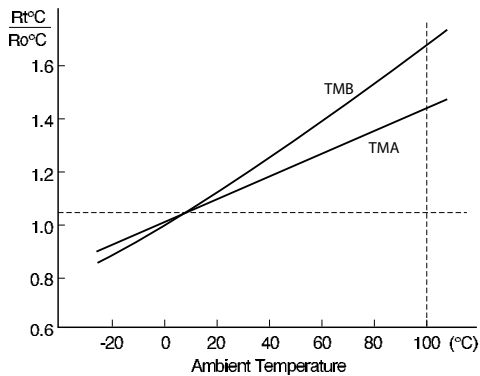


Temperature of Resistor Surface

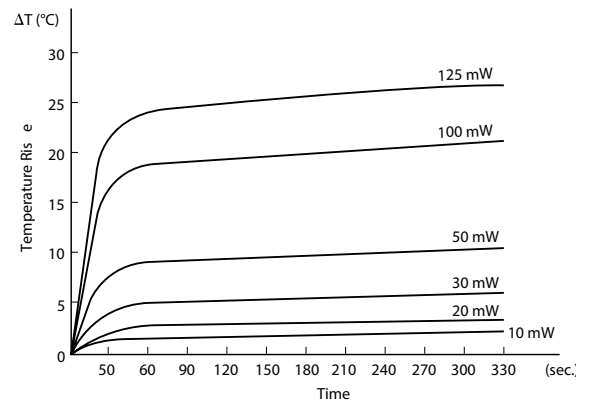


Response Time to Temperature Change

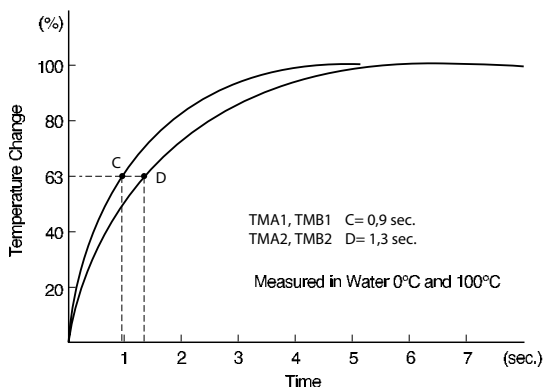

TCR Spread

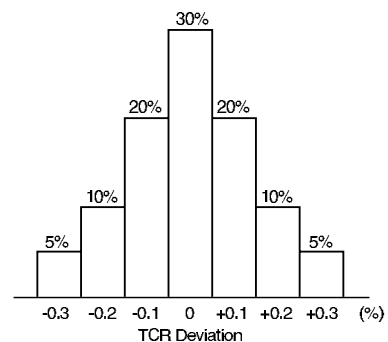

Technical Drawing

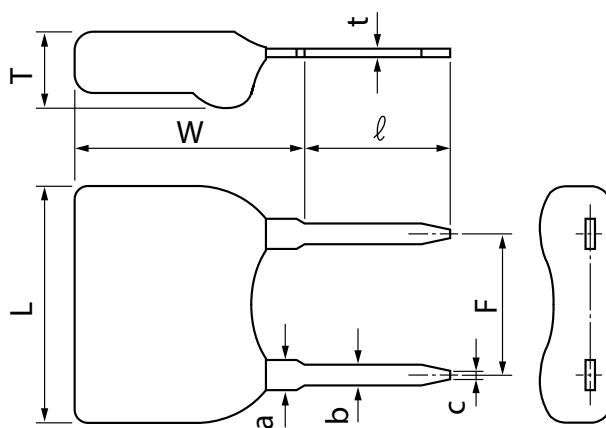

Type	TMA1 / TMB1	TMA2 / TMB2
L	5.6 ± 0.5	
W	6.2 ± 0.5	8.2 ± 0.5
T	2.2 ± 0.5	
F	2.54 ± 0.25	
l	5.0 ± 1.0	
t	0.3 ± 0.05	
a	1.0 ± 0.05	
b	0.65 ± 0.05	
c	0.4 ± 0.05	

Data Sheet for Precision Resistors

Thermistor PTC resistor (metal foil)

Series TM

Order code					
Description		Selection: standard=black/bold, possible options=grey/cursive			
Series:	TM				
Type / size:		A			
Housing length (w) 6,2 mm		B			
Housing length (w) 8,2 mm					
Resistance tolerance:			W0,5%		
±0,5%			W1%		
±1%			W2%		
±2%			W5%		
±5%					
Resistance value - please choose and note:				xkxxx	
TMA from 5Ω to ≤ 100Ω @ 0,125W					
TMA from 5Ω to ≤ 200Ω @ 0,25W					
TMB from 5Ω to ≤ 500Ω @ 0,125W					
TMB from 5Ω to ≤ 1kΩ @ 0,25W					
Power rating:					1
0,125W					2
0,25W					

Order Example	Series	Type	Resistance tolerance	Resistance value	Power Rating
Choice	TM	Housing length 6,2 mm	±1%	10Ω	0,125W
Code	TM	A	WA1%	k010	1